



Getting Started with OGS200

ElectroChem
Originalys

CONTENTS

1. WELCOME	5
2. SETTING UP THE CELL	5
2.1 SETTING UP THE FOLD OUT FEET	5
2.2 CONNECTING THE ELECTRODES.....	6
2.2.1 The OrigaTrod Rotating electrode	6
2.2.2 Tips for OrigaTrod and StaTrod	7
2.2.3 Other electrode settings.....	8
3. COVER THE CELL.....	9
4. CONNECTING OGS200 TO THE PC	9
5. POWERING UP THE OGS200	10

LIST OF FIGURES

Figure 1: Foot legs.....	5
Figure 2: Connecting the electrodes	6
Figure 3: OrigaTrod	6
Figure 4: OrigaTrod connections.....	7
Figure 5: Electrode tips.....	7
Figure 6: Cover the cell.....	9
Figure 7: Connecting OGS200 to the PC.....	9

1. Welcome

The OGS200 system is ideal for application for surface treatment, studying corrosion, testing batteries and fuel cells and developing new materials.

OGS200 is compact and easily transportable thanks to its handle and protective cover, it can thus be installed near the subject under study or the bath to be checked. With its 24 V battery power supply (12 V if using a converter), OGS200 is the ideal tool to carry out field analyses.

Your OGS200 system is computer-controlled so you will find most of the information you need in the Help file of OrigaMaster 5 Software. Consult the Help index whenever you have a question.

2. Setting up the cell

2.1 SETTING UP THE FOLD OUT FEET

Your OGS200 Electrochemical system is fitted with 2 lateral fold out feet providing a safe stability of the whole instrument. Put these 2 fold out feet in place before installing the electrochemical cell.



Figure 1: Foot legs

2.2 CONNECTING THE ELECTRODES

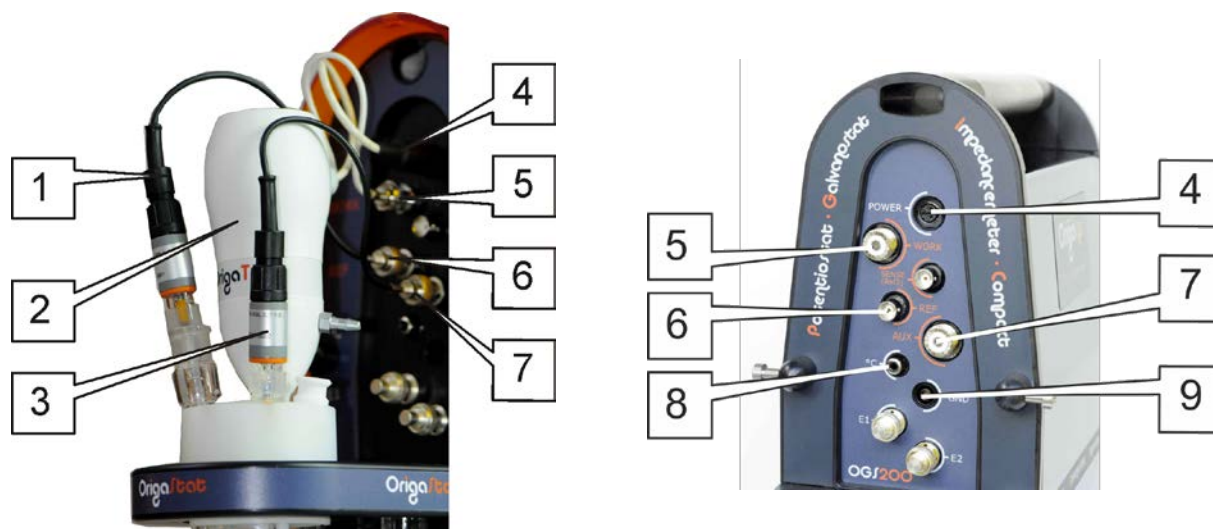


Figure 2: Connecting the electrodes

Generally, the electrochemical cell is connected to your OGS200 Electrochemical system using a 3-electrode setting as follows:

- The working electrode (ref. 2) to the WORK BNC socket (ref. 5),
- The auxiliary electrode (ref. 3) to the AUX BNC socket (ref. 7),
- The reference electrode (ref. 1) to the REF BNC socket (ref. 6).

On high resistive electrolytes are used, you can ground the cell by placing it inside a metal casing connected to the GND socket (ref. 9).

If you want to measure temperatures using a temperature measuring probe (CTN or Pt-1000), connect it to RCA socket (ref. 8).

2.2.1 The OrigaTrod Rotating electrode



Figure 3: OrigaTrod

As working electrode, you can also use the OrigaTrod Rotating electrode. The OrigaTrod electrode is fitted with 2 connecting plugs:

- a mini DIN 6 plug to be connected to the "Power" socket (ref. 1) of the OGS200. With this connection, the rotating speed of the OrigaTrod is controlled by the OGS200 unit and OrigaMaster 5,
- a BNC shielded plug to be connected to the BNC WORK socket (ref. 2) of the OGS200. This connection is used for the contact signal of the working electrode.



Figure 4: OrigaTrod connections

2.2.2 Tips For OrigaTrod and StaTrod

Supplied with no tips in standard version, the OrigaTrod Rotating electrode is available with a wide range of OrigaLys active tips in various materials and diameters (see table below). It can also be equipped with M6 compatible tips.

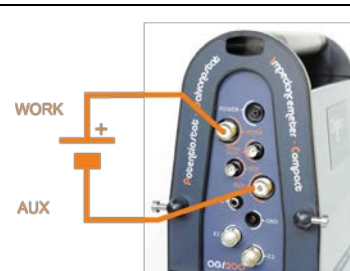
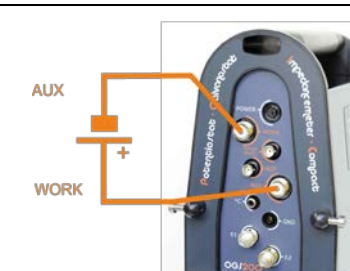
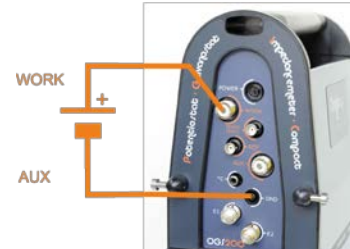
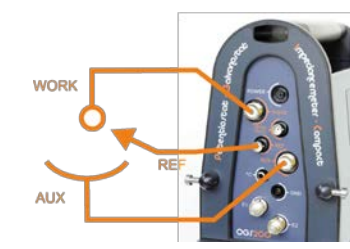
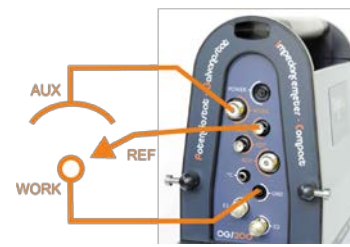
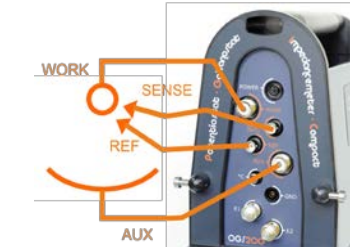
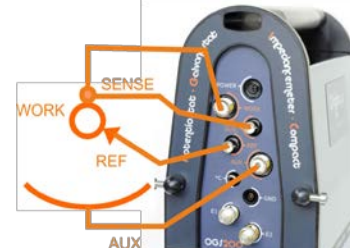
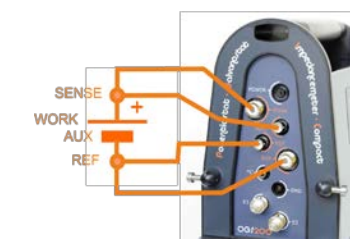


Figure 5: Electrode tips

OrigaLys Ref. no.	Description	OrigaLys Ref. no.	Description
EM-EDT-Pt-D2	ø2 mm Platinum tip	EM-EDT-Sn-D5	ø5 mm Tin tip
EM-EDT-Pt-D5	ø5 mm Platinum tip	EM-EDT-Fe-D5	ø5 mm Iron tip
EM-EDT-Au-D2	ø2 mm Gold tip	EM-EDT-Cd-D5	ø5 mm Cadmium tip
EM-EDT-Au-D5	ø5 mm Gold tip	EM-EDT-Pb-D5	ø5 mm Lead tip
EM-EDT-CVJ-D3	ø3 mm Glassy carbon tip	EM-EDT-Sb-D5	ø5 mm Antimony tip
EM-EDT-CVJ-D5	ø5 mm Glassy carbon tip	EM-EDT-Pd-D2	ø2 mm Palladium tip
EM-EDT-Gr-D4	ø4 mm Graphite tip	EM-EDT-Rd-D2	ø2 mm Rhodium tip
EM-EDT-Ag-D5	ø5 mm Silver tip	EM-EDT-W-D1	ø1 mm Tungsten tip
EM-EDT-Cu-D5	ø5 mm Copper tip	EM-EDT-W-D4	ø4 mm Tungsten tip
EM-EDT-Ni-D5	ø5 mm Nickel tip		

2.2.3 Other electrode settings

Various 2, 3 or 4 electrode settings are possible. The following table sums up the different possibilities when working in potentiostatic mode.

<p align="center">2 electrodes « Normal 2 »</p> 	<p align="center">2 electrodes « Inverted 2 »</p> 
<p align="center">2 electrodes – Aux electrode to electrical zero</p>	<p align="center">3 electrodes « Normal 3 »</p>
	
<p align="center">3 electrodes « Inverted 3 » Reference electrode to SENSE (REF2)</p>	<p align="center">4 electrodes « Normal 4 » 2 reference electrodes (REF (REF1) and SENSE (REF 2))</p>
	
<p align="center">4 electrodes with SENSE (*)</p>	<p align="center">4 electrodes – 4-point measurements (**)</p>
	

SENSE (*): system allowing to compensate automatically the Working electrode both cable and contact resistances.

4-point measurements (**): system allowing to compensate automatically the electrode cables and/or contact resistances.

3. Cover the cell

After having connected the electrodes, put the protective cover in place as shown below.



Figure 6: Cover the cell

4. Connecting OGS200 to the PC



Figure 7: Connecting OGS200 to the PC

Connect the USB socket (ref. 1) on the OGS200 to an USB port on the PC using a standard USB 2.0 cable.



Printer connection : connect the printer to a parallel or USB port on the PC.

5. Powering up the OGS200

- Connect the OGS200 mains socket (ref. 3) to the mains using the line cord provided.
- Switch on the OGS200 (ON/OFF switch (ref. 2)).